

# Torishima Pump Global Network



## East Asia

- 1 Torishima Pump Mfg. Co., Ltd. ■ ■  
1-1-8 Miyata-cho, Takatsuki-city, Osaka 569-8660 Japan  
Tel : +81-72-690-2308 / Fax : +81-72-690-2329
- 2 Kyushu Torishima Co., Ltd. ■  
9857-13, Ohaza Kawako, Wakagi-cho, Takeo-city, Saga 840-0813 Japan  
Tel : +81-954-26-3081 / Fax : +81-954-26-3080
- 3 Torishima Pump Mfg. Co., Ltd. Beijing Office  
Rm707, Building 1, KUNSHA CENTER, No.16 Xinyuanli, Chaoyang District, Beijing, P.R.China PC:100027  
Tel : +86-10-84682891 / Fax : +86-10-84682890
- 4 Torishima Pump (Tianjin) Co., Ltd. ■  
No.9 Gaoxin Road, Wuqing Development Zone, Tianjin, P.R.China PC:301700  
Tel : +86-22-59695601 / Fax : +86-22-59695609
- 5 Torishima (Hong Kong) Ltd.  
Unit A, 21/F., Tower A, Billion Centre, 1 Wang Kwong Road, Kowloon Bay, Kowloon, Hong Kong  
Tel : +852-2795-1838 / Fax : +852-2754-3293

## South East Asia

- 6 Torishima (Hong Kong) Ltd. Vietnam Office  
No.76 Bui Thi Xuan Street, Hai Ba Trung District, Hanoi, Socialist Republic of Vietnam  
Tel : +84-4-943-7880 / Fax : +84-4-943-7876
- 7 Torishima Pump Mfg. Co., Ltd. Singapore Office  
82 Toh Guan Road East, #C2-14-4 WaterHub, Singapore 608576  
Tel : +65-6779-0123 / Fax : +65-6779-6900
- 8 Torishima Service Solutions Asia Pte. Ltd. ■  
48, Toh Guan Road East, #02-142, Enterprise Hub, Singapore 608586  
Tel : +65-6933-8772 / Fax : +65-6933-8777

- 9 P.T. Torishima Guna Engineering ■  
10 P.T. Torishima Guna Indonesia ■  
Jalan Rawa Sumur Timur No.1 Pulogadung Industrial Estate, P.O.Box 1160, Jakarta, Indonesia  
Tel : +62-21-460-3963 / Fax : +62-21-460-3937
- 11 P.T. Geteka Founindo ■  
JL Pulo Ayang Kav. AA2 Pulogadung Industrial Estate, P.O.Box 1160 JAT, Jakarta 13011 Indonesia  
Tel : +62-21-460-3963 / Fax : +62-21-460-3937

## South Asia

- 12 Torishima Pumps India Pvt. Ltd.  
302 & 302A, 3rd Floor, Tower-B, Millennium Tower, Sector27, Gurgaon-122002, Haryana, India  
Tel : +91-124-4728950 / Fax : +91-124-4728950
- 13 Torishima Pumps India Pvt. Ltd. Service Division ■  
Plot No. 27 B, C, D, Hoskote KIADB Industrial Area, Chokkahalli Village, Kasaba Hobli, Hoskote Taluk, Bangalore-562114, Karnataka, India  
Tel : +91-80-39581000 / Fax : +91-80-39581010

## Oceania

- 14 Torishima Australia Pty. Ltd.  
643-645 Glenhuntly Road, Caulfield South VIC 3162 Australia  
Tel : +61-3-9523-7998

## Middle East

- 15 Torishima Service Solutions FZCO ■  
Plot of Land TP010501 Techno Park-Jebel Ali, PO Box. 37603 Dubai, U.A.E.  
Tel : +971-4-880-7344 / Fax : +971-4-880-7354
- 16 Torishima Pump Mfg. Co., Ltd. Middle East Office  
Office No.901, Deluxe Tower, Delma Street, Al Nahyan Camp Area, P.O.Box 53567, Abu Dhabi, U.A.E.  
Tel : +971-2-674-3880 / Fax : +971-2-674-3881
- 17 Torishima Pump Mfg. Co., Ltd. Qatar Project Office  
Office No.11,1st Floor, West Corner Centre, Salwa Road-Midmac R/A, P.O.Box 37027 Doha, Qatar  
Tel : +974-4450-6915 / Fax : +974-4450-6916

- 18 Torishima Pump Mfg.Co.,Ltd. Saudi Arabia Office  
Al Riyadh, Al Khair Plaza, Office No.2 Al Amir Muhd IBN A.A. Road, Alahlea SP-643351929, Kingdom of Saudi Arabia  
Tel : +966-11-2931366

## Europe

- 19 Torishima Europe Ltd.  
2 Colliery Gate, Clyde Gateway East, Glasgow G32 8RH Scotland, UK  
Tel : +44-1236-443951 / Fax : +44-1236-702875
- 20 Torishima Service Solutions Europe Ltd. ■  
2 Colliery Gate, Clyde Gateway East, Glasgow G32 8RH Scotland, UK  
Tel : +44-1236-442390 / Fax : +44-1236-702875
- 21 Torishima Europe Projects Ltd.  
Torishima House, Brook Lane, Westbury, Wiltshire BA13 4ES England, UK  
Tel : +44-1373-858143
- 22 Torishima Europe Ltd. Madrid Office  
Avda. Fuente Nueva 12, 28703 San Sebastian de los Reyes, Madrid, Spain  
Tel : +34-91-002-7541 / Fax : +34-91-284-6901
- 23 Torishima Europe Ltd. Poland Office  
ul. Pomianowska 7, 03-136 Warszawa, Poland  
Tel : +48-604-557-137

## North America

- 24 Torishima Pump Mfg. Co., Ltd. North America East Office  
100 Grove Street, Suite 217, MA 01605-2654 U.S.A.  
Tel : +1-508-753-6600 / Fax : +1-508-753-8276

## Central America

- 25 Torishima Europe Ltd.  
Av Paseo de La Reforma 350,11th floor, Juárez,Cuauhtémoc, 06600 Ciudad de México,D.F., México  
Tel : +52-55-9171-1426 / Fax : +52-55-9171-1499

■ Manufacturing ■ Service Center

P52213-M,S-02/2E  
\*16.02.1000©



# CAM (Cast Iron)

# CAS (Stainless Steel)

End-Suction Volute Pump





# Go Green with the Eco Pumps, CA series.

## End-Suction Volute Pump (16 bar type)

**CAM is made from Cast Iron.**  
**CAS is made from Stainless Steel.**




As a high efficiency Eco Pump, the 16 bar type CA series offer a wide range of specification, design and material to meet your needs.

### High Efficiency Pump and Motor

#### Optimized Hydraulic Performance

CFD optimized casing design ensures smooth fluid flow.

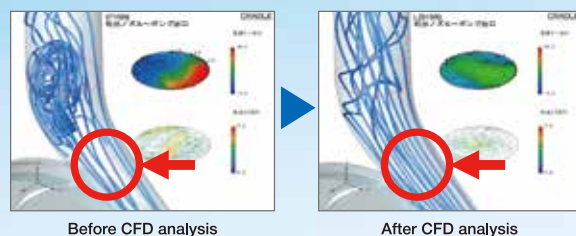

#### 3D impeller

Three dimensional curved impeller optimizes fluid flow.



#### Ultra High Efficiency Motor



Torishima Ultra high efficiency motor is equivalent to IEC IE3 (premium efficiency).



TU motor (Torishima Ultra high efficiency motor)


### Meeting Customer's Specification (Impeller Cut)

The impeller diameter can be cut to meet the customer's specification to reduce unnecessary power consumption.

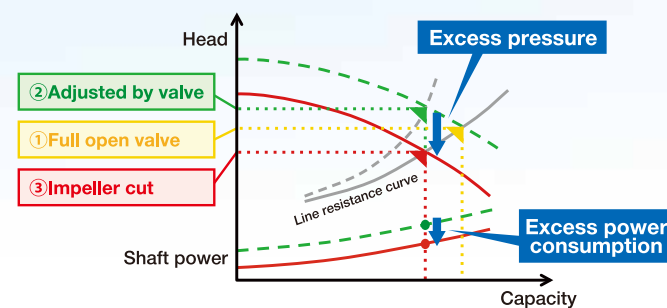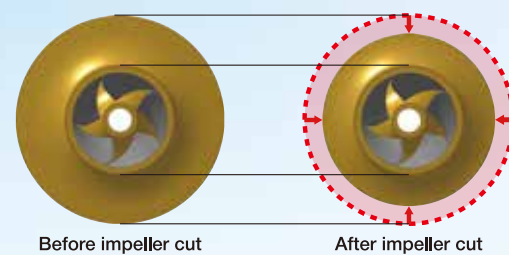

### Low NPSH (High Suction Performance)

Low NPSH performance enables lower suction level which reduces plant construction costs.

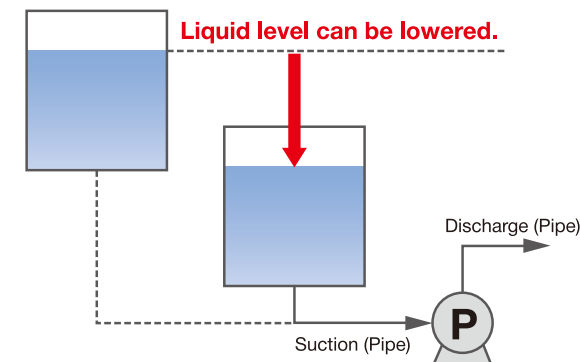

**Applications** High quality materials and structural designs are adopted to meet specification requirements for a variety of applications, including petrochemical, chemical and general industries, seawater desalination, high temperature heating equipment, energy-related equipment, cooling water circulation for skyscrapers, district heating and cooling, water transferring, and water feeding.



### Stable Operation

Stable pump performance enables valve control and parallel operation.

### High Head and Capacity, High Suction and Discharge Pressure

The CA series of CAM and CAS achieve high head and high flow rate compared to the other CA series of CAL and CAR. In addition, the optimization of casing thickness and shape, angular contact bearing, the match of cylindrical roller bearing, and the balance mechanical seal enables the highest pressure resistance of CA series.

### Excellent Parts Interchangeability

Excellent parts interchangeability allows to share parts among various pump types and thus you do not need to buy or store spare parts. (☞ page 4 for details)

### Handling Various Liquids and Temperature

Suitable mechanical seal and gland packing are available to meet various specification requirements. A multi-spring single mechanical seal is supplied as standard. Minimal leakage from seal improves cleanliness around pump.

### Simple Maintenance

A back pull-out assembly facilitates removal of the shaft without dismantling the piping. In addition, an optional spacer coupling facilitates dismantling and inspection of the pump without disturbing the motor. (☞ page 9 for details)


### Short Delivery

Stock management with an excellent quality control system enables short pump delivery time.



Performance comparison CAM to CPCN that is a former type of CAM.

— CAM65-240    - - - CPCN80-200

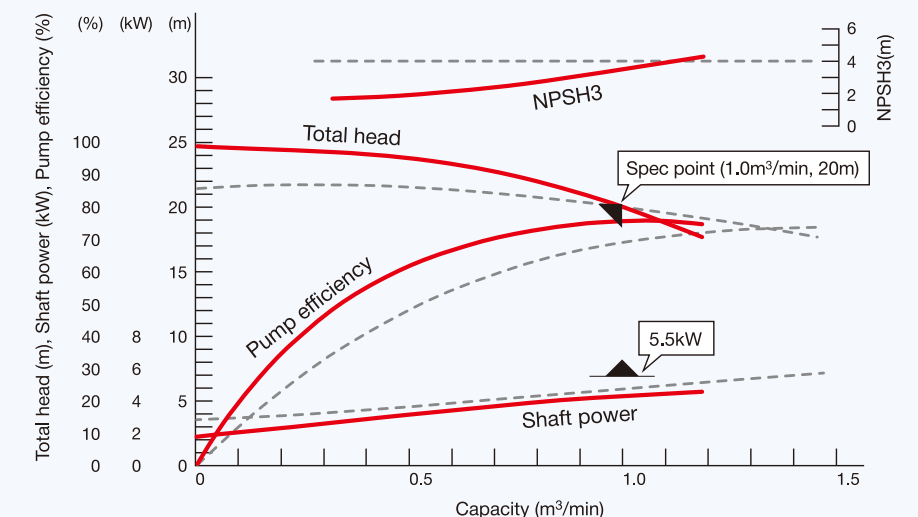
**Improved pump efficiency and stability!**



# Specification

		<b>CAM (Cast Iron)</b> 	<b>CAS (Stainless Steel)</b> 
Handled liquid	Kinds	Clean water, Warm water, Oil, Chemical medicine, Brine, Heat transfer media, etc.	Pure water, Hot water, Sea water, Salted water, Refrigerant, Electrodeposition paint, Abrasive slurry liquid under 3wt%, etc.
	Temperature	Standard: -10°C to +80°C Option: -30°C to +350°C	Standard: -10°C to +80°C Option: -40°C to +220°C
Max. allowable discharge pressure		Standard: 1.6MPa Option: 2.5MPa	Standard: 1.4MPa Option: 2.5MPa
Max. allowable suction pressure		Standard: 1.0MPa (Deep groove ball bearing) Option: Max. allowance discharge pressure - Pump shut-off head (Angular contact bearing + Cylindrical roller bearing) Ex.) In case of 2.5MPa max. allowance discharge pressure (Casing: FCD [CAM], SCS1T1 [CAS]) and 0.5MPa pump shut-off head, allowable suction pressure is 2.0MPa.	
Structure	Impeller	Closed	
	Shaft seals	Standard: Unbalanced mechanical seal (SiC x Carbon) Option: Unbalanced mechanical seal (SiC x SiC, Tungsten Carbide x Tungsten Carbide, etc.), Double mechanical seal, balanced mechanical seal, Gland packing	
	Lubricated bearing	Standard: Oil lubrication Option: Grease lubrication	
Flange standard		Standard: JIS20K RF Option: JIS10K, ASME125lb/150lb/250lb/300lb, JPI150lb/300lb	Standard: JIS10K RF Option: JIS20K, ASME150lb/300lb, JPI150lb/300lb
Pump material	Casing	Standard: FC250 Option: FCD400-15	Standard: SCS13 Option: SCS14, SCS1T1 (SCS16, 11)
	Impeller	Standard: FC200 Option: FCD400-15, SCS1T1, SCS13	Standard: SCS13 Option: SCS1T1, SCS14
	Shaft	Standard: SUS420J2 Option: SCM440Q, SUS316L, SUS329J1, SUS304, SUS316	Standard: SUS304 Option: SUS420J2, SUS316, SUS316L, SUS329J1

# Design Features

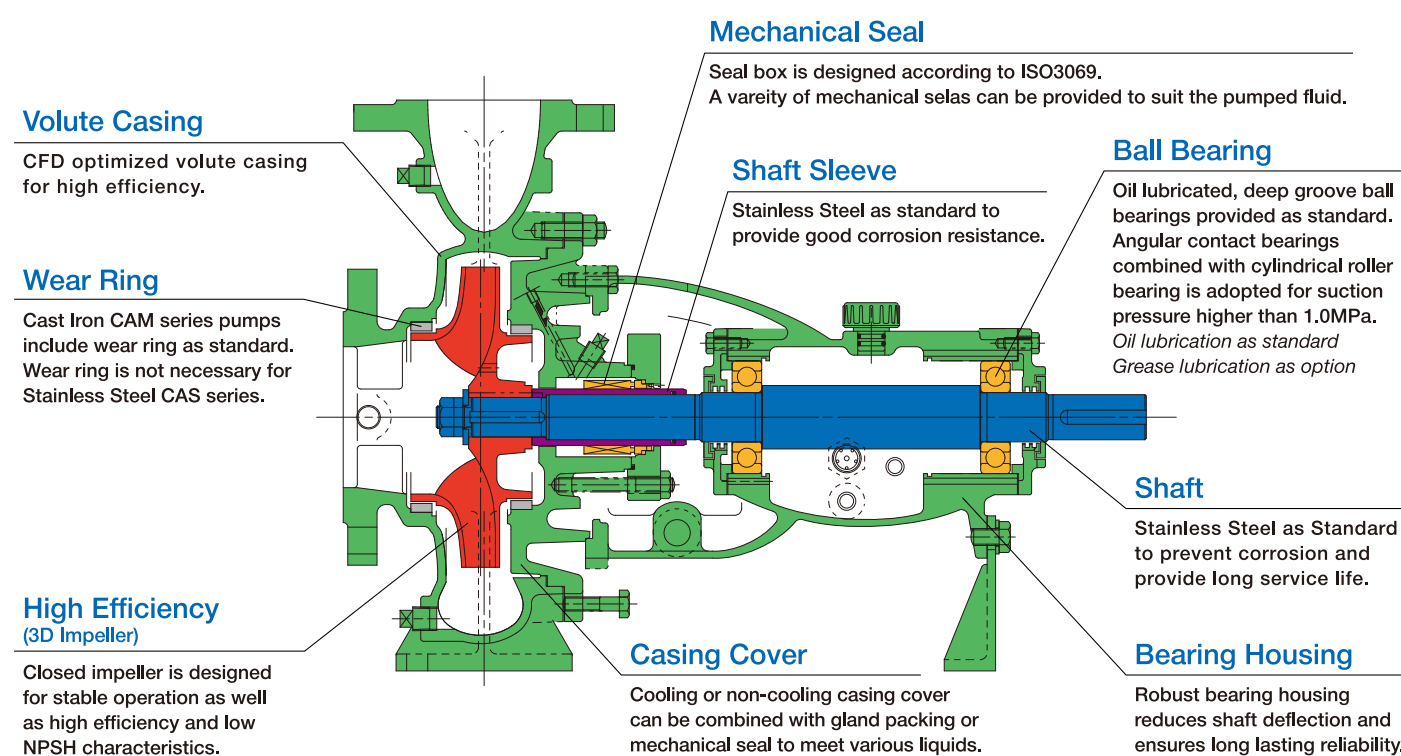

# Parts Interchangeability

■ **2P type** Same color and number in the same parts indicate interchangeability.

Pump type	Parts	Casing	Casing Cover	Bearing Housing	Shaft	Mechanical Seal
32-125		1				
40-125		2	1			
65-125		3				
32-160		4				
40-160		5	2	1	1	1
50-160		6				
32-200		7				
40-200		8	3			
50-200		9				
80-160		10	4	2	2	
80-200		11	5			
32-250		12				
40-250		13	6	3	3	2
50-250		14				
80-250		15	7			

■ **4P type** Same color and number in the same parts indicate interchangeability.

Pump type	Parts	Casing	Casing Cover	Bearing Housing	Shaft	Mechanical Seal
32-125		1				
40-125		2	1			
65-125		3				
32-160		4				
40-160		5	2	1	1	1
50-160		6				
65-150		7				
32-200		8				
40-200		9	3			
50-200		10				
65-190		11				
100-125		12	4			
80-150		13	5	2	2	
80-190		14	6			
125-160 *		15	7			
100-190 *		16	8	3	3	
32-250		17				
40-250		18	9	2	2	2
50-250		19				
65-240		20				
80-240		21	10			
100-250 *		22				
40-315		23		3	3	
50-315		24	11			
65-310		25				
80-310		26				
100-310 *		27	12	4	4	
150-190 *		28				
150-200 *		29	13	3	5	
200-200 *		30				
125-240 *		31	14	4	6	3
125-250 *		32				
200-240 *		33	15	5	7	
200-250 *		34				
125-310 *		35	16	4	6	
125-315 *		36	17	5	7	
80-400		37				
100-400 *		38	18	6	8	
125-400 *		39				
250-240 *		40	19	7	9	4
250-250 *		41				
150-310 *		42	20			
150-315 *		43	21			
250-310 *		44	22			
250-315 *			23			
150-390 *			24			
150-400 *			25			
100-500 *						
125-500 *						
150-500 *						
200-390 *						
200-400 *						
200-490 *						
200-500 *						

6P type follows above \*.



# Selection Range Charts

