


# CDMV

## Vertical Double Suction Pump


### Applications

<b>Energy Industry</b>	Water Intake, Distribution, Boosting, Circulation, Drainage, Fire-Fighting
<b>General Industry</b>	Water Intake, Distribution, Boosting, Circulation, Drainage, Seawater Desalination, Fire-Fighting
<b>Building</b>	Water Supply, Drainage, District Heating and Cooling
<b>Water Works</b>	Water Intake, Distribution, Water Supply
<b>Agriculture</b>	Irrigation, Drainage
<b>Others</b>	Pipe-Line Boosting, etc.

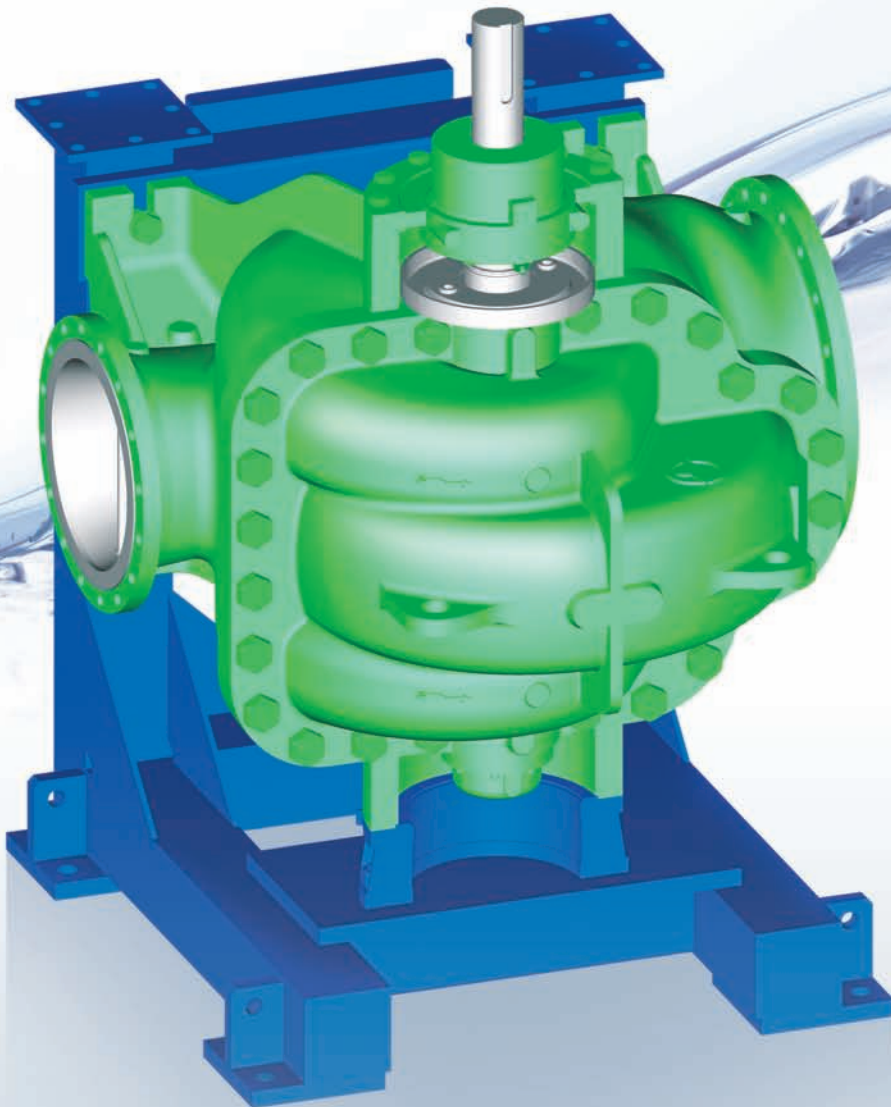

# CDMV-Vertical Double Suction Pump

- ✓ Compact & High Efficiency Design for Low Life Cycle Cost & Energy-Saving
- ✓ Installable at Limited Space

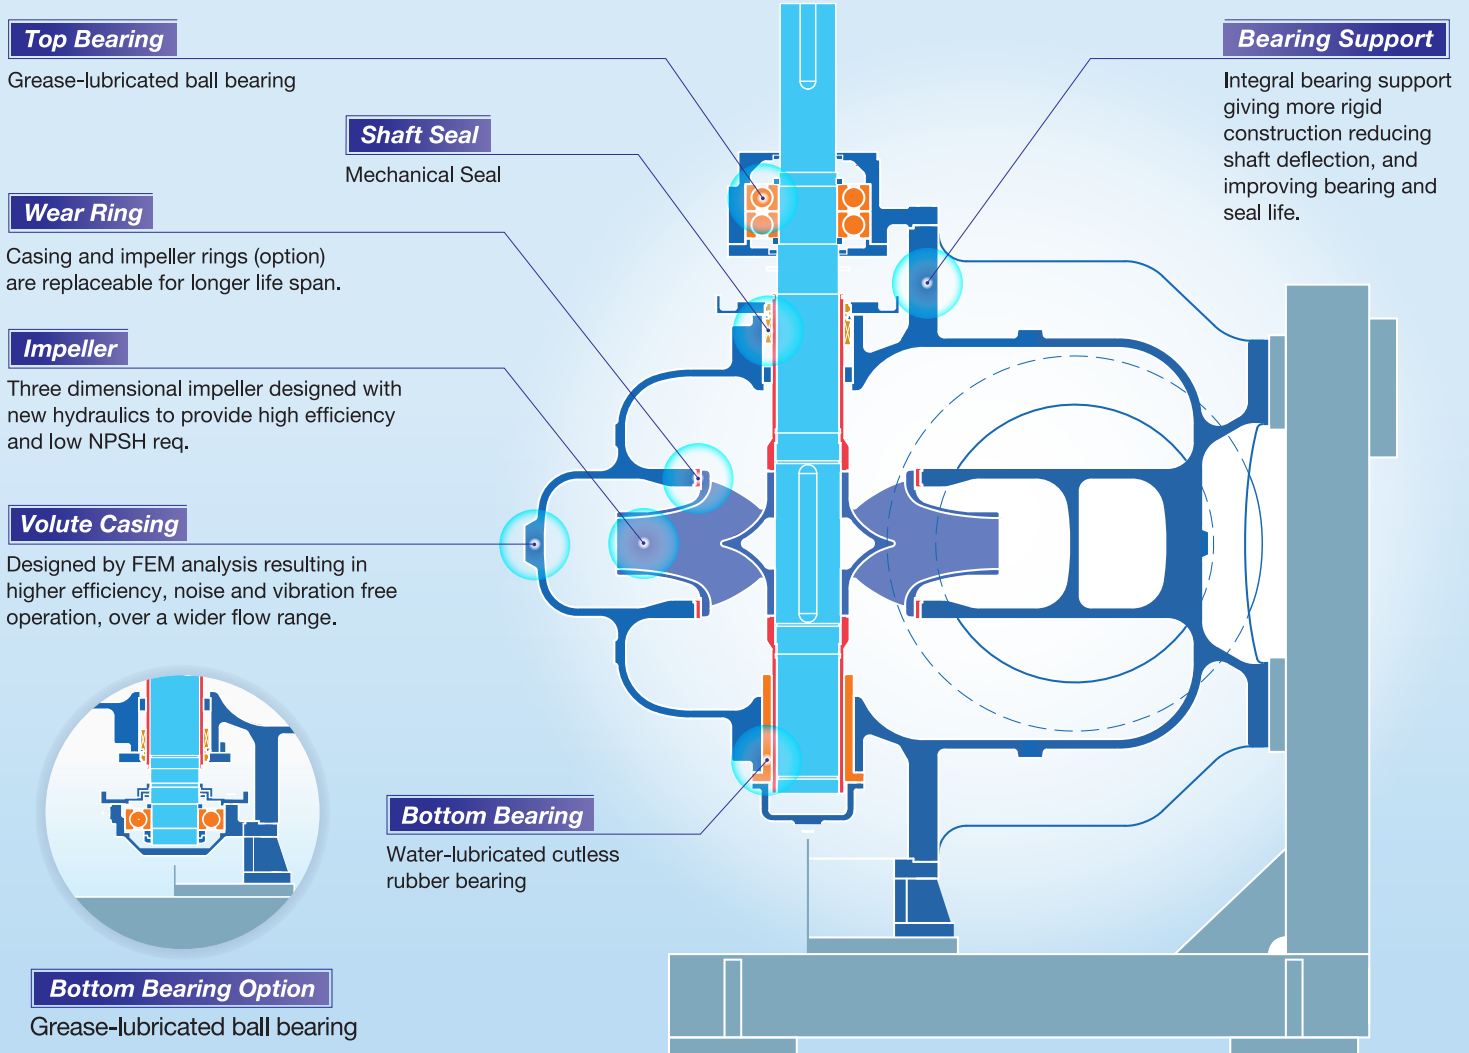

## Technical Data

- Capacity :** 100 to 3,400m<sup>3</sup>/h
- Total Head :** 3 to 220m (10 to 720ft)
- Temperature :** up to 80°C (176°F)
- Size :** 200 to 500 mm (8 to 20 in)

## Materials

- ◆ **Volute casing**  
Cast Iron, Ductile Cast Iron, Stainless Steel, Duplex Stainless Steel
- ◆ **Impeller**  
Cast Iron, Bronze, Stainless Steel, Duplex Stainless Steel
- ◆ **Shaft**  
Carbon Steel, Chrome-Molybdenum Steel, Stainless Steel, Duplex Stainless Steel
- ◆ **Shaft Sleeve**  
Bronze, Stainless Steel, Duplex Stainless Steel

## Performance Range

